

LASOS

For worldwide photonics

LASOS[®] DPSS laser series



Single frequency diode-pumped
solid state laser modules



Single frequency diode-pumped solid state laser modules

LASOS® DPSS laser series

The LASOS® DPSS laser series is the best choice when reliability and long lifetime matters. The special optical design and an intelligent power and temperature control guarantee

- Excellent long-term stability
- Low noise
- Exceptional good beam quality
- Long lifetime

These characteristics are ideal for a variety of applications as in DNA sequencing, flow cytometry, digital imaging, analytical chemistry, fast-flow-rate particle measurements or confocal microscopy. Since all laser models emit only a single longitudinal mode they are also an ideal choice for application in RAMAN-spectroscopy. Housed in compact and robust, packages, these lasers are the perfect choice for design in and integration into OEM instrumentation and systems and also for end user applications in research and development. The lasers will be provided as self-contained laser modules, as OEM-component modules or as fully integratable subsystems, with a compact controller as OEM or stand alone version with computer interfacing.

Customized solutions for specific applications are possible. All laser models can be provided with a polarization maintaining, adjustment free fiber coupling.


DPSS laser

	BLK ▼	GLK ▼	GLK ▼	YLK ▼	RLK ▼
Wavelength [nm]	473.1±0.3	532.3±0.3	540.0±1	561.3±0.3	639.6±0.5
Output power [mW]	5,10	20, 50, 75, 100	20, 50	20, 50, 75	50, 75, 100
Beam diameter [mm]	0.7	0.7 / 0.32	0.7 / 0.32	0.7	0.7
Beam divergence [mrad]	< 1.1	< 1.2	< 1.2	<1.3	< 1.4
Beam Ellipticity	0.9...1.1				0.9...1.1
Beam quality M ² (TEM ₀₀)	< 1.2 (TEM ₀₀)				< 1.2 (TEM ₀₀)
Output power stability over 8 h	< ± 1%				< ± 1%
Wavelength stability during 8 h	< ±0.002 nm				< ±0.002 nm
Pointing stability	< 6 μrad/K				< 6 μrad/K
Line width	< 5 MHz				< 5 MHz
Optical noise (30 Hz-10 MHz)	< 0.5 % rms				< 2 % rms
Polarization ratio (vertical)	> 200:1				> 200:1
Warm up time	< 10 min				< 10 min

Model key for orders and enquiries:

Model - Wavelength - Output power - Beam diameter - Controller - Cable length, or other options
(example: GLK - 532.3 - 50 - 0.32 - 2)



Dimensions laser head [mm]:

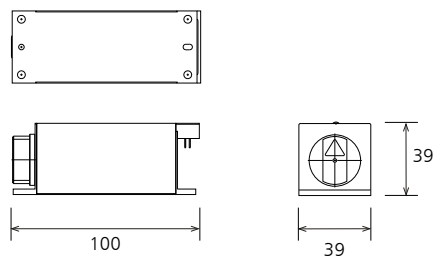


Fiber coupled version:

Fiber type	Single mode, polarization maintaining
Fiber jacket	3 mm PVC, optional: 5 mm steel-reinforced, 5 mm stainless steel
Output connector	FC or customized
Coupling efficiency	> 70%

Dimensions laser head fiber coupled [mm]:

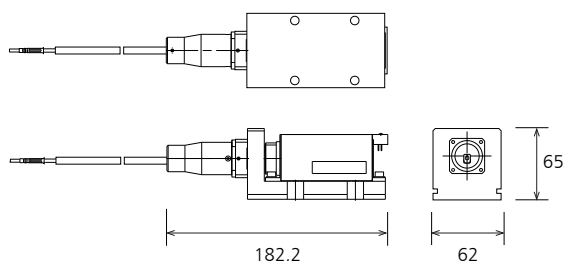



Controller

CKL 2400

CKL 1000




Interface	RS232	USB 2.0. RS232
Options	CDRH and OEM versions	CDRH and OEM versions
	Available as PCB in eurocard size	
Operating voltage	12 or 24 V	12 or 24 V

Operating current (at 24 V input voltage):




Typical	< 0.6 A	< 0.6 A
Maximum	2 A	2 A

Controller cable length	1 or 2 m	1 or 2 m
-------------------------	----------	----------


Dimensions controller CKL 2400 [mm]:




Dimensions controller CKL 1000 [mm]:




Features of the LASOS® DPSS laser series:

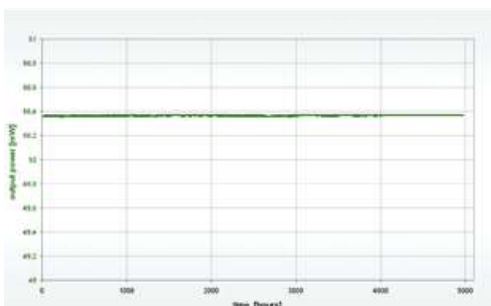

Excellent long-term power and pointing stability

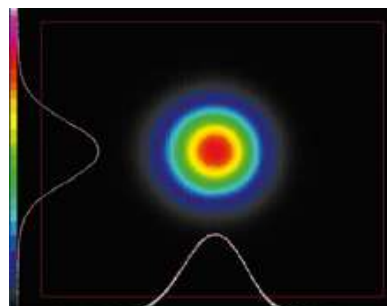

Exceptional good beam quality

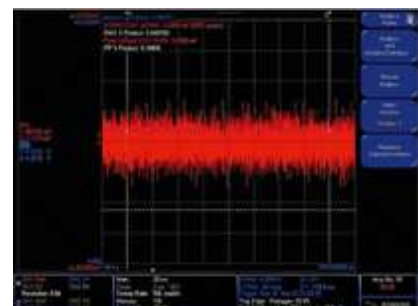

Low Noise

LASOS

For worldwide photonics

LASOS Lasertechnik GmbH
Carl-Zeiss-Promenade 10, 07745 Jena
Germany

Phone: +49 (0) 36 41 - 29 44 - 0
Fax: +49 (0) 36 41 - 29 44 - 17
info@lasos.com

www.lasos.com

Europe

Benelux

Te Lintelo Systems BV
Phone: +31 316 340804
Fax: +31 316 340805
sales@tlsbv.nl
www.tlsbv.nl

Czech / Slovakia Republic

LAO industrial systems, s.r.o.
Phone: +42 241 046800
Fax: +42 241 046850
klecka@lao.cz
www.lao.cz

France

BFI OPTILAS S.A.S.
Phone: +33 1 60795906
Fax: +33 1 60798901
photonique.fr@bfioptilas.com
www.bfioptilas.fr

Spain

Dachs Elektronika S.A.
Phone: +34 93 7418508
Phone: +34 93 7418509
adachs@dachs.es
www.dachs.es

Sweden / Norway /

Denmark / Finland

Optonyx AB
Phone: +46 855 111410
Fax: +46 855 111415
info@optonyx.com
www.optonyx.com

Italy

Laser Optronik S.p.A.
Phone: +39 2 574651
Fax: +39 2 57410127
lop@laseroptronic.it
www.laseroptronic.it

Crisel Instruments S.R.L.
Phone: +39 6 35402933
Fax: +39 6 35402879
penco@crisel-instruments.it
www.crisel-instruments.it

United Kingdom / Ireland

Lambda Photometrics Limited
Phone: +44 1582 764334
Fax: +44 1582 712084
wing@lambdaphoto.co.uk
www.lambdaphoto.co.uk

America

USA / Canada / Mexico

Market Tech, Inc.
Phone: +1 800 3265714
Fax: +1 831 4611136
info@markettechinc.net
www.markettechinc.net

Asia

China / Hongkong

Universal Technology Co., Ltd.
Phone: +86 10 85283377
Fax: +86 10 85282766
oe@universalkhco.com.cn

India

Thomas Kirchner Co.
Phone: +49 3641 622810
Fax: +49 3641 622840
thomask@somt-solutions.com

Japan

Autex, Inc.
Phone: +81 3 32266321
Fax: +81 3 32266290
sales32@autex-inc.co.jp
www.autex-inc.co.jp

Japan Laser Corporation
Phone: +81 3 52850861
Fax: +81 3 52850860
jlc@japanlaser.co.jp
www.japanlaser.co.jp

Korea

DongWoo Optron Co., Ltd.
Phone: +82 31 7650300
Fax: +82 31 7650222
optron@optron.co.kr
www.optron.co.kr

Taiwan

Tayhwa Technology Co., Ltd.
Phone: +886 2 23569737
Fax: +886 2 23569659
tayhwa@tayhwa.com.tw
www.tayhwa.com.tw